


Hardware Specifications



ALPHA

Elite™ • S9C

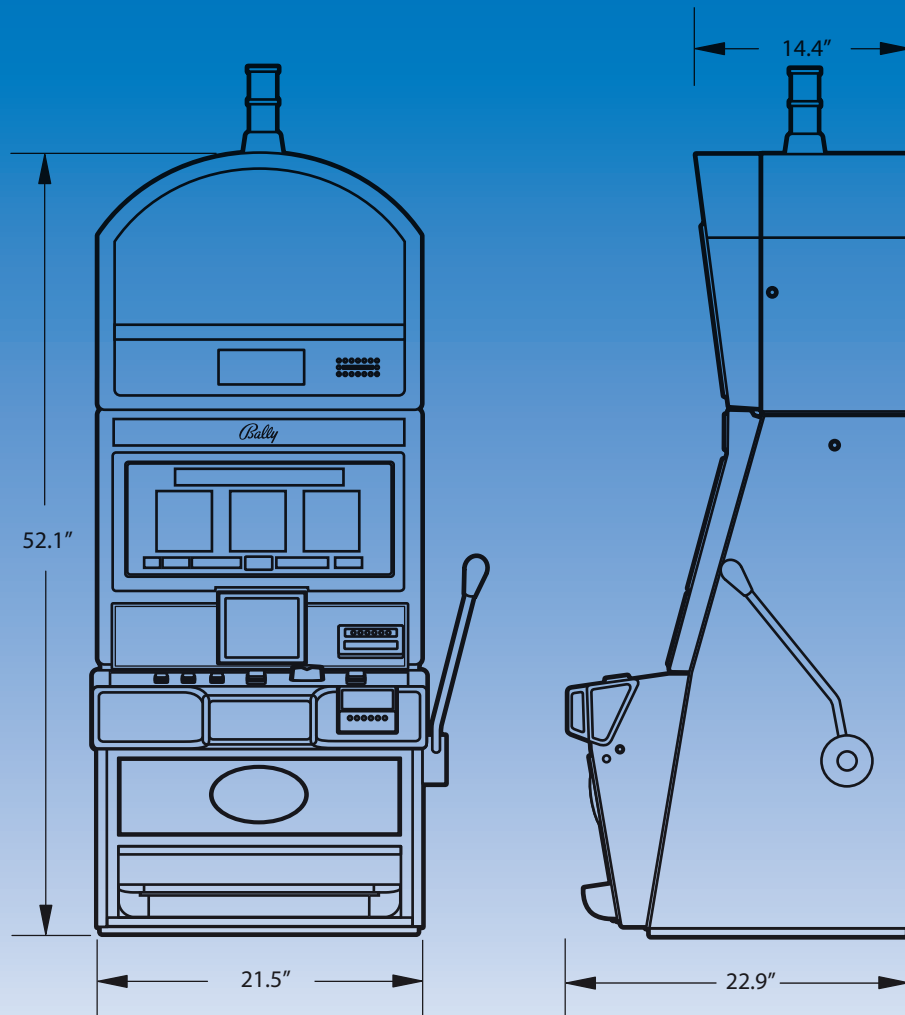

The **ALPHA Elite™ S9C** focuses reel players on the game. With mechanical reels and a touchscreen monitor centrally located, the player never has to look beyond the middle of the cabinet to take in all the action.

- The S9C offers 3, 4, and 5 reel games along with a 6.3" touchscreen monitor in the center door.
- 52.1" high allowing back-to-back floor configuration with Bally's ALPHA S9000™ steppers and ALPHA M9000™ video cabinets.
- The additional PCI board in the MPU adds support for certain S6000™ themes, with multi-denominational support and up to three percentages per theme.
- Uses Bally's ALPHA OS™ with its user-friendly interface.
- Stereo speakers.
- Supports all major player tracking systems in the top box.
- Common components with Bally's S9000 product line, reducing spares inventory.
- Switched and unswitched outlets included.
- Individual cabinet and main power switches.

ALPHA Elite™ S9C

Specifications

BILL ACCEPTORS	JCM® WBA®/UBA™, MEI Cashflow™
BILL ACCEPTOR BEZEL OPTIONS	LED Bezel (standard), Sentry™
BILL ACCEPTOR CASHBOX OPTIONS	Metal, Plastic, JCM Intelligent, MEI easitrax™
TICKET PRINTERS	Ithaca® 950, FutureLogic Gen2™
COIN ACCEPTORS	MC-40 (Coin Mechanisms Inc.), IDX
HOPPERS	Bally
PROGRESSIVE SUPPORT	Internal, External, Mystery
ADJUSTABLE OPTIONS	Multi-denominational, Multi-percentage
BUTTON PANELS SUPPORTED	5 Button, 8 Button, 10 Button, 15 Button
CUSHIONED FRONT BUMPER	Extended/Ergonomic, Flat
FOOTREST	Standard, Sled
TOP BOXES OFFERED*	17" Oval with Paytable Glass and Player Tracking
TOPPERS*	Oval, Round
SAS VERSIONS SUPPORTED	SAS 6.01 with AFT, Promotional Credits, Earlier SAS versions also supported.
SCREEN	Diagonal: 6.3" Height: 4.9" Width: 4.2"
SCREEN RESOLUTION	800 × 600 pixels

RECOMMENDED STAND HEIGHT

19" (483 mm)

CABINET

Weight:	233 lbs (105.6 kg)
Height with Tower Light:	57.60" (1464 mm)
Height without Tower Light:	52.10" (1324 mm)
Width:	21.50" (547 mm)
Depth:	22.86" (581 mm)

POWER SUPPORTED

	110 volts, 220 volts
Startup/Surge State:	3.4 A
Operating State:	2.1 A
Max Load:	6.3 A
Power Consumption:	797 BTU/hr

Typical currents are provided for reference only. Actual current use will depend upon machine configuration and addition of supplemental equipment such as, but not limited to, systems monitoring equipment, progressive equipment, and service equipment.

SAFETY RATINGS

UL, CSA, CE, FCC

FINISHES AND LAMINATES

Chrome or Gold, Custom laminate

TOWER LIGHTS

2 Tier Short/Tall, 3 Tier, 4 Tier

LOCKS

Top box, Upper cabinet. Lower cabinet, Belly/drop door, Cash box door, Cash box, CPU, CompactFlash® card, Stand, All lock openings are 5/8" x 3/4". Locks 1 1/8" long can be used with spacers to maintain the 1/2" lock length. Dual locks are optional.

*game dependent



www.BallyTech.com

CineVision_C3_r0609v2.1

6601 S. Bermuda Road
Las Vegas, NV 89119
(702) 584-7700 Phone
(702) 584-7770 Fax

©2007 Bally Gaming, Inc.